


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04M</b>	<b>A2</b>	<b>(11) International Publication Number:</b> <b>WO 98/27702</b> <b>(43) International Publication Date:</b> 25 June 1998 (25.06.98)
<b>(21) International Application Number:</b> PCT/IL97/00414 <b>(22) International Filing Date:</b> 18 December 1997 (18.12.97)  <b>(30) Priority Data:</b> 119873 19 December 1996 (19.12.96) IL 120605 4 April 1997 (04.04.97) IL  <b>(71)(72) Applicant and Inventor:</b> GHASSABIAN, Firooz [FR/IL]; Kashani Street 13, 69499 Ramat-Aviv (IL).  <b>(74) Agent:</b> REINHOLD COHN AND PARTNERS; P.O. Box 4060, 61040 Tel Aviv (IL).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>

**(54) Title:** A WRIST-MOUNTED TELEPHONE DEVICE**(57) Abstract**

A wrist-mounted cellular telephone device for attaching to a wearer's wrist. The device comprises a cellular phone mechanism mounted in a housing and a battery power source coupled to the housing. The battery power source circumferentially extends along at least a substantial portion of the wearer's wrist.

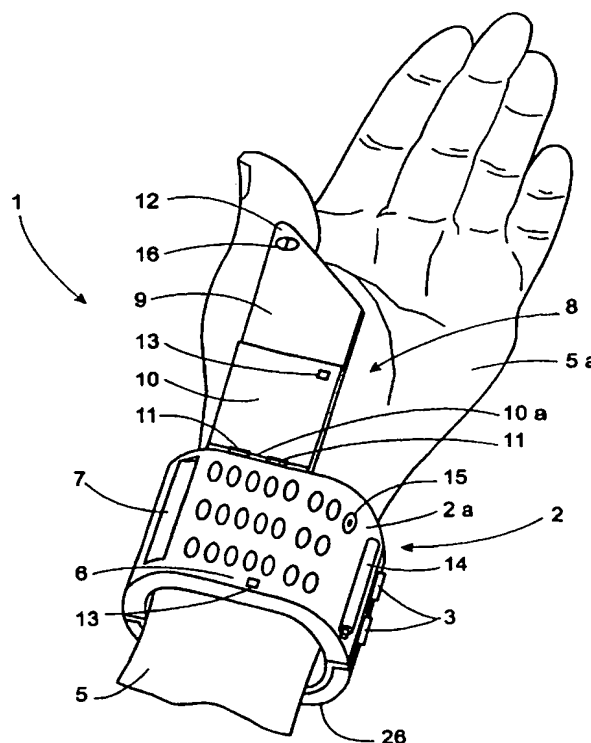

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## **A wrist-mounted telephone device**

### **FIELD OF THE INVENTION**

The present invention generally relates to portable cellular telephone devices.

### **5 BACKGROUND OF THE INVENTION**

A cellular telephone is a familiar personal communication accessory which is widely used. Early models were bulky, being carried in motor vehicles or in back packs. Further developed models were stored in a pocket or clipped onto a belt when not in use. They were, therefore, prone to  
**10** falling, breaking, or simply being forgotten. Additionally, these models suffered from the time loss caused by taking such cellular telephones out of a garment pocket, or belt holder, adjusting the phone's orientation to actuate an answer mode.

A number of wrist telephone devices have been developed and disclosed, for example, in U.S. Patents Nos. 5,239,521; 5,274,513; 5,224,076. In all these disclosures a telephone device is typically in the form of a wristwatch fastened to the user's wrist via a strap, wherein a cellular phone  
5 mechanism replaces that of a watch in its conventional location. The main components of a cellular phone mechanism, such as transceiver, telephone call initiating means, a keyboard, a voice recognition device, a display, etc., as well as a battery power source, are accommodated within a common case. A microphone and a speaker are usually incorporated within the strap.

10 For example, in a device disclosed in the U.S. Patent No. 5,239,521, a strap has a member pivotally coupled thereto in a manner to be rotatable between its inoperative position, being aligned with and fastened to the strap, and an operative position, being perpendicular to the strap. The pivotal member functions as an ear piece, having a receiver at its free end and  
15 a microphone mounted on or close to its opposite end, proximate to the strap.

The telephone devices disclosed in the above patents suffer from a common disadvantage associated with the fact that a battery is substantially small in size and, therefore, low-power. Indeed, the battery is always a part of the case containing the phone mechanism, which case is supported on the  
20 user's wrist like a watch unit by means of a conventional strap.

WO Publication No. 95/35622 discloses a telephone device which may be used as a wrist-watch cellular phone by mounting it onto a conventional strap to be attached to the user's wrist. Here, a battery is accommodated in a separate case which is, at its one end, coupled by hinges  
25 to the end of a case containing the phone mechanism. However, the battery is still of a small size and associated with the same portion of the user's wrist as the case containing the cellular phone mechanism. The two interconnected cases are typically associated with the strap which connects their free ends and supports them on the user's wrist.

- 3 -

It is thus evident that in the conventional devices of the kind specified a battery is too small to meet the requirements of the user, while a strap always occupies at least half of the user's wrist, which is free of both the battery and phone mechanism.

- 5** Additionally, most of the known cellular phone devices suffers from a disturbance caused thereby when it starts to ring, for example, when the user is at public gathering, concert, lecture, or the like. It is often the case that the user wishes his cellular phone to be permanently switched on so as to be immediately informed of an incoming call. However, it would clearly be
- 10** desirable for the phone device to be actuated in a manner to inform the user of an incoming call without disturbing others within his/her close vicinity. In order to solve such a problem, a vibrator is usually included in the cellular phone mechanism and is connected to a phone ringer in a manner to cause a continuous vibration of the whole cellular phone device when actuated by an
- 15** incoming call. It is understood that this act of vibrating the whole device results in significant waste of energy.

### SUMMARY OF THE INVENTION

- It is thus a major object of the invention to eliminate the above
- 20** listed and other disadvantages of conventional cellular phone devices and provide a novel wrist-mounted telephone device.

- It is a further object of the invention to provide such a device which is shaped like a bracelet, wherein all main components of a cellular phone mechanism and a battery power source are distributed around the user's
- 25** wrist in the most effective manner. This enables to design a battery of significantly larger dimensions and easily replaceable without disturbing the cellular phone mechanism itself.

It is a still further object of the present invention to provide such a device which includes a vibrator which, when actuated, indicates a wearer of

an incoming call without causing the vibration of the whole device.

There is thus provided according to one aspect of the present invention a wrist-mounted telephone device for attaching to a wearer's wrist, the device comprising:

- 5       a cellular phone mechanism accommodated in a housing;  
a battery power source coupled to said housing, wherein the battery power source circumferentially extends along at least a substantial portion of the wearer's wrist.

- 10       Preferably, the housing and the battery power source form together a first and a second interlocking parts, respectively, of a bracelet. The construction may be such that at least one of the first and second portions of the bracelet has C-shaped or flat geometry.

- 15       It is understood that the battery power source is adapted to be electrically connected to the cellular phone mechanism. The electrical connection may be in the form of wires.

Preferably, the battery power source substantially occupies the wearer's wrist. The housing containing the cellular phone mechanism may be located at a palm side of the wearer wrist.

- 20       The housing and the battery power source are coupled by a connector providing mechanical engagement thereof. The connector may comprise hinges, or a clasp mechanism, or at least one belt. The connector is substantially small so as not to occupy a significant portion of the wearer's wrist. In the case of the belt, it may be formed of plastic, fabric, or the like material.

- 25       The cellular phone mechanism comprises an ear piece extendable towards a region of a palm of the wearer and retractable to a region of the housing. Preferably, the ear piece is extendable along an axis of the wearer's arm. The ear piece may be extended by means of a flip open cover pivotally coupled to the housing and may be further extended by at least one telescopic,

or accordion like segment of the cover. Alternatively, the ear piece of the cellular telephone mechanism may be mounted at an end of a tube having a securing arrangement for securing to a wearer's finger. Upon release of the securing arrangement, the tube is retracted into the housing by means of a  
**5** resilient biasing means coupled to the end of the tube.

The battery power source may comprise a single battery circumferentially extending along at least a substantial portion of the wearer's wrist, or a plurality of batteries coupled to each other and each circumferentially extending along the wearer's wrist. It is understood that a  
**10** battery of any kind may be employed. The battery may be removably accommodated within a case.

If the plurality of batteries is employed, each of them may be accommodated within its case and the cases are coupled to each other. To this end, the device, preferably, comprises an electric circuit adapted for  
**15** selectively connecting the cellular phone mechanism to a preset one of the plurality of batteries.

Preferably, the cellular phone mechanism includes an antenna, which may be of a telescoping kind. The device may also comprise an indication means responsively coupled to the cellular phone mechanism for  
**20** alerting the wearer of an incoming call. The indication means preferably comprises a vibrator in the form of a mechanical assembly including a reciprocating prong for prodding the wearer's wrist. The device may also comprise at least one data display panel.

Preferably, the device also comprises a watch unit. The watch unit  
**25** and housing are disposed in a diametrically opposite relationship on the wearer's wrist.

According to another aspect of the present invention there is provided a wrist-mounted telephone device for attaching to a wearer's wrist, the device comprising:

a cellular phone mechanism accommodated in a housing;  
a battery power source coupled to said housing; and  
a wrist-watch unit disposed diametrically opposite to the housing  
containing the cellular phone mechanism.

- 5**           The battery power source may be contained in a case coupled to the housing. The wrist-watch unit may be electrically and/or mechanically connected to the battery power source.

### BRIEF DESCRIPTION OF THE DRAWINGS

- 10**           In order to understand the invention and to see how the same may be carried out in practice, several preferred embodiments will now be described, by way of example only, with reference to the accompanying drawings, in which:

**Fig. 1** is a pictorial illustration of a wrist-mounted cellular phone device  
**15** according to one embodiment of the invention;

**Fig. 2** is a pictorial view of the device of Fig. 1 more specifically illustrating an unlocked position thereof;

**Fig. 3a** is a side view of the portion of the device of Fig. 2, more specifically illustrating a mini-vibrator;

**20**           **Fig. 3b** is a partly exploded view of the device of Fig. 1 with a retracted flip open cover and a battery in its removed position;

**Figs. 4a to 4c** illustrate three more embodiments of the invention;

**Fig. 5a** illustrates still another embodiment of a wrist-mounted cellular phone device having a wrist-watch mounted thereon; and

**25**           **Fig. 5b** is a cross-section of the device of Fig. 5a, more specifically illustrating a coupling means for mounting the wrist-watch on to the cellular phone device.



- 7 -

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figs. 1 and 2 there is shown a device generally designated **1** which comprises a housing in the form of a bracelet **2** having two C-shaped portions **2a** and **2b**. The portions **2a** and **2b** are at one end permanently coupled by a pair of hinges **3** so as to be pivotal one relative to the other between a closed state of the bracelet **2** when being worn on a wrist **5** of the user, and an open state for removing the bracelet from the user's wrist. The portions **2a** and **2b** at an opposite end are interlocked by a clasp mechanism of known type, for example having a latch **4** made on an inside butt end **2c** to engage a respective recess made in an interfacing butt end (not shown) of the portion **2a**. It is understood that appropriate means are provided for easily unlocking the latch **4** by the user's hand.

It is also appreciated that any other coupling mechanism may be employed for the same purpose of providing such a mechanical engagement between the portions **2a** and **2b** that, on the one hand, is insured against accidental unlocking, and, on the other hand, is adapted to be easily unlocked by the user. For example, a magnetic clasp mechanism may be used.

As shown in Fig. 1, the bracelet **2** wraps around the user's wrist **5** in such a manner that all main components of a conventional cellular phone mechanism, except for the battery, are disposed at one side **5a** of the wrist **5**, for example, a palm side. Thus, the portion **2a** is provided on the outside thereof with a conventional keypad **6** easily available for the user, and a liquid crystal display **7**. The display **7** is typically capable of displaying a number currently dialed by the user when transmitting an outgoing call from the device **1**, and also a number of a remote telephone device generating an incoming call, if such option is authorized by an owner of the remote telephone.

Coupled to the portion **2a** of the bracelet **2** is a flip open telescopic

cover, generally at 8, formed of two hinged plates 9 and 10. The plate 10 is recessed and slightly larger than the plate 9 so as to receive the latter thereinside in a conventional manner. To this end, the plate 10 may be provided internally with a pair of spaced parallel guides, extending along  
5 opposite sides of the plate 10 for supporting the plate 9. Such a telescopic arrangement is well known and, therefore, is not specifically illustrated. Hence, the plate 9 is adapted for sliding movement between a folded position thereof when being partly inserted into the plate 10 (Fig. 2) and an extracted position completely projecting from the plate 10 (Fig. 1). An end 12 of the  
10 plate 9 is angled and, when in the folded position of the plate 9, protrudes from the plate 10, as better shown in Fig. 2. The plate 10 is at its one end connected by a pair of hinges 11 to the portion 2a, so as to be rotatable relative to the portion 2a between an open, extracted position of the plate shown in Fig. 1, and a closed, retracted position, when it partly covers the  
15 keypad 6. Such a partly retracted position is shown in Fig. 2. To this end, the cover 8 may be formed of a flexible material. A two-segment magnetic clasp, generally at 13, is suitably accommodated on the portion 2a and the plate 10, to keep the cover 8 closed.

It is appreciated that the magnetic clasp 13 may be replaced by any  
20 other suitable means, for example, a spring mechanism. It should be noted, although not specifically shown, that the display 7, or an additional suitable display may be located on either side of the plate 10.

Further provided is a conventional antenna 14 which may be a  
telescopic antenna, mounted on the portion 2a opposite to the display 7. The  
25 antenna 14 may be supported on either end of either portion of the bracelet 2 in a manner to extend across the supported portion, so that an axis of the antenna 14 is parallel to the user's arm. Also provided are a conventional microphone 15 (constituting a mouth piece) mounted on the portion 2a and a

speaker unit 16 (constituting an ear piece) located on the angled end 12 of the plate 9.

As illustrated in Fig. 3a, one of the essential feature of the present invention is the provision of a mini-vibrator 17 having a reciprocating prong 5 18 projecting from the portion 2a and responsive to a ring signal for prodding the user's wrist so as to inform him/her of an incoming call without disturbing others in the vicinity. A miniature, rubber, disk-shaped washer 20 is attached to a projecting end of the prong 18, which is connected at its opposite end to a conventional cellular phone ringer (not shown) in such a manner that the 10 latter, when actuated by an incoming call, actuates the mini-vibrator 17 causing the reciprocation of the prong 18. In public places where the regular audible ring would disturb, it may be de-actuated, whilst still allowing the user to be informed, via the mini-vibrator 17, of an incoming call. It is evident that the above construction requires substantially small amount of power and 15 does not cause, when in operation, vibrations of the whole device 1.

Reference is now made to Fig. 3b, illustrating another essential feature of the present invention. A battery 21 is illustrated being shaped like a part of the bracelet 2 and being dimensioned so as to be fit into and removed out of the portion 2b which is generally hollow and functions as a battery 20 holder member. To this end, the hollow portion 2b is provided internally with a pair of peripheral slots, or guides, so as to allow the battery to be slid in and out in a conventional manner. It is understood, although not specifically shown, that the battery 21 is electrically connected to the respective components of the phone mechanism accommodated in the portion 2a. To 25 this end, electric wires are appropriately located inside the portions 2a and 2b.

If desired, the portion 2b may be of two parts construction both parts being, for example, curved-shaped sections designed so as to accommodate a battery therebetween. The construction may be similar to that

used in tapes for inserting and removing cassettes, which is known *per se* and therefore need not be specifically described except to note that it usually includes a spring arrangement actuated by a press button.

Alternatively, although not specifically shown, the battery **21** itself  
**5** may be provided with a clasp mechanism of a known type and, when attached, for example, in the manner described above with respect to the portions **2a** and **2b**, completes the overall bracelet shape, thus functioning as an integral portion **2b** of the bracelet. The construction may be such that the portion **2b**, i.e. associated with the battery, wraps around the whole wrist  
**10** and the portion **2a**, i.e. associated with the phone mechanism, is appropriately coupled to the portion **2b** thereabove. Obviously, instead of single battery as described above, two or more batteries having appropriate electric circuit connectors may be employed. For this purpose, the portion **2b** may be formed of two or more segments connected by hinges, short belts or the like, each  
**15** either carrying a battery thereinside or itself being a battery. In the case of short belts, they are short enough so as not to occupy a significant portion of the wearer's wrist. It should be specifically noted that any kind of battery may be employed.

The device **1** being a cellular phone device is designed to include  
**20** such features of conventional cellular phones as time, date, alarm clock, automatic dialing mode, a phone book, etc. Additionally, a sensor means is provided for automatically putting the device into an operative mode when the plate **10** of the cover is rotated into its open position, and *vice versa*. All these functions are well known *per se* and, therefore, need not be specifically  
**25** described.

The user wears the cellular phone device **1** on his wrist **5**, and when using the device, holds his hand to the side of his face in a natural hand position with the bracelet **2** near a region of his mouth. The microphone **15** in the bracelet portion **2a** is thereby proximate the user's mouth, whilst the tips

of his fingers are close to his ear. The speaker **16** in the extended plate **9** of the cover may now be held near to the user's ear. Cupping of the fingers serves to filter out background noise, and simultaneously provide a resonant external cavity for improving the audio quality of the sound emanating from  
**5** the speaker.

Reference is now made to Figs. 4a, 4b and 4c illustrating three more embodiments of the present invention, which are in general similar to the above described embodiment and, therefore, those components which are identical in all embodiments are identified by the same reference numerals.

**10** Cellular phone devices **100** and **200** are distinguished from each other and from the device **1** by somewhat different constructions of a flip open cover. Thus, as clearly shown in Fig. 4a, a cover **108** is formed of two plates **109** and **110** pivotally coupled by a pair of hinges **111** and **112**, wherein the speaker is mounted on the plate **109**. It will be readily understood that the cover **108** is  
**15** foldable and extendable like an accordion. An additional two-part magnetic clasp is provided in a conventional manner on an inner surface **109a** of the plate **109** interfacing an inner side **110a** of the plate **110**, which is not specifically shown. Obviously, such magnetic clasp may be replaced by any other means suitable for the same purpose. A cover **209** of the cellular phone  
**20** device **200** is a three-plate telescopic cover, wherein a last plate **209** is slidably insertable into a center plate **210** which, in turn, is receivable by a plate **211** in a manner described above with reference to Figs. 1 - 3.

Turning now to Fig. 4c, the cellular phone device **300** has no cover at all and is characterized by a flexible thin tube **309** containing connections  
**25** to the speaker **16** mounted on its free end **309a**. The other ends of the electrical connections are connected to an audio output of the cellular phone. As shown, the free end **309a** of the wire **309** is attached to a forefinger **310** of the user by means of a loop **311** (constituting a securing means). Thus, the

user's hands are substantially free for operating the phone device 300. A coil spring (not shown) is fixed at one end to the portion 2a and is fixed at an opposite end to the free end 309a of the tube 309. When the tube 309 is drawn into the extended operated position as shown in Fig. 4c, the coil spring  
5 is resiliently biased so as to allow for automatic retraction by the coil spring of the tube 309 when required.

It should be noted that both of the C-shaped portions of the bracelet 2 in any of the preferred embodiments described above are preferably formed with rough inner surfaces overlying the user's wrist 5 for preventing  
10 undesirable movement of the bracelet 2.

Referring to Figs. 5a and 5b, there is illustrated a cellular phone device which is similar to any of the preferred embodiments of the invention, for example the device 1, and additionally comprises a watch unit 30 mounted on the portion 2b. To this end, a conventional bolt-and-nut assembly 32 is  
15 provided. For example, a screw-threaded bolt 34 projects from a bottom side of the watch unit 30 so as to be received by a nut 36 made in the portion 2b. Obviously, any other means may be used for the same purpose. For example, the watch 30 may be mounted on, or integrally formed with, its housing which, in turn, may be coupled to the bracelet 2 by hinges or the like. It  
20 should be noted that the construction may be such that the same battery 21 of the cellular phone device 1 supplies power to the watch 30.

It will be readily appreciated by those skilled in the art that many modifications may be applied to the invention as exemplified without departing from its scope as defined in and by the appended claims. Thus, for  
25 example, antenna may be an integral part of either a telescoping or accordion-shaped cover containing the ear piece, or an integral part of the tube attaching the ear piece to the bracelet.

## CLAIMS:

1. A wrist-mounted telephone device for attaching to a wearer's wrist, the device comprising:
  - 5 a cellular phone mechanism mounted in a housing;  
a battery power source coupled to said housing, wherein the battery power source circumferentially extends along at least substantial portion of the wearer's wrist.
  2. The device according to Claim 1, wherein the housing and the  
10 battery power source form together a first and a second interlocking parts, respectively, of a bracelet.
  3. The device according to Claim 1, wherein the battery power source substantially occupies the wearer's wrist.
  4. The device according to Claim 1, wherein the battery power  
15 source is electrically connected through wires to the cellular phone mechanism.
  5. The device according to Claim 1, wherein the housing and the battery power source are coupled by a connector providing mechanical engagement thereof.
  - 20 6. The device according to Claim 5, wherein said connector comprises hinges.
  7. The device according to Claim 5, wherein said connector comprises a clasp mechanism.
  8. The device according to Claim 5, wherein said connector  
25 comprises at least one belt which is short enough so as not to occupy significant portion of the wearer's wrist.
  9. The device according to Claim 8, wherein said at least one belt is made of a plastic material.
  10. The device according to Claim 8, wherein said at least one belt

is made of a fabric material.

11. The device according to Claim 1, wherein the cellular phone mechanism comprises an ear piece extendable towards a region of a palm of the wearer and retractable to a region of said housing.

5 12. The device according to Claim 11, wherein the ear piece is extendable along an axis of the wearer's arm.

13. The device according to Claim 11, wherein the ear piece is extended by means of a flip open cover pivotally coupled to the housing.

10 14. The device according to Claim 13, wherein the ear piece is further extended by at least one accordion like segment of said cover.

15. The device according to Claim 13, wherein the cover includes at least one telescopic member, the ear piece being attached to said member.

16. The device according to Claim 11, wherein the ear piece of the cellular telephone mechanism is mounted at an end of a tube having a  
15 securing arrangement for securing to a wearer's finger.

17. The device according to Claim 16, wherein the tube is retracted into the housing upon release of said securing arrangement by means of a resilient biasing means coupled to the end of the tube.

18. The device according to Claim 1, wherein said battery power  
20 source comprises at least one battery circumferentially extending along at least a substantial portion of the wearer's wrist.

19. The device according to Claim 1, wherein said battery power source comprises a plurality of batteries coupled to each other, each of the batteries circumferentially extending along a portion of the wearer's wrist.

25 20. The device according to Claim 2, wherein the second portion of the bracelet is at least one battery.

21. The device according to Claim 18, wherein said at least one battery is removably accommodated within a case.

22. The device according to Claim 19, wherein each of said plurality



of batteries is accommodated within its case, the cases being coupled to each other.

23. The device according to Claim 19, wherein the device also comprises an electric circuit adapted for selectively connecting the cellular  
5 phone mechanism to a preset one of the plurality of batteries.

24. The device according to Claim 2, wherein at least one of the first and second portions of the bracelet is C-shaped.

25. The device according to Claim 2, wherein at least one of the first and second portions of the bracelet has a flat geometry.

10 26. The device according to Claim 1, wherein the cellular phone mechanism includes an antenna.

27. The device according to Claim 26, wherein said antenna is of a telescoping kind.

28. The device according to Claim 1, and also comprising an  
15 indication means responsively coupled to the cellular telephone mechanism for alerting the wearer of an incoming call.

29. The device according to Claim 28, wherein the indication means comprises a vibrator in the form of a mechanical assembly including a reciprocating prong for prodding the wearer's wrist.

20 30. The device according to Claim 1, and also comprising a data display panel.

31. The device according to Claim 1, wherein the housing containing the cellular phone mechanism is located at a palm side of the wearer's wrist.

32. The device according to Claim 1, and also comprising a watch  
25 unit, wherein said watch unit and housing are disposed in a diametrically opposite relationship on the wearer's wrist.

33. A wrist-mounted telephone device for attaching to a wearer's wrist, the device comprising:

a cellular phone mechanism accommodated in a housing;

a battery power source coupled to said housing, wherein the battery power source circumferentially extends along at least substantial portion of the wearer's wrist; and  
a wrist-watch unit disposed diametrically opposite to the housing.

**5**       **34.** The device according to Claim 33, wherein the battery power source is contained in a case coupled to said housing.

**35.** The device according to Claim 33, wherein the wrist-watch unit is electrically connected to said battery power source.

**10**       **36.** The device according to Claim 33, wherein said wrist-watch unit is mechanically coupled to said battery power source.

1/5

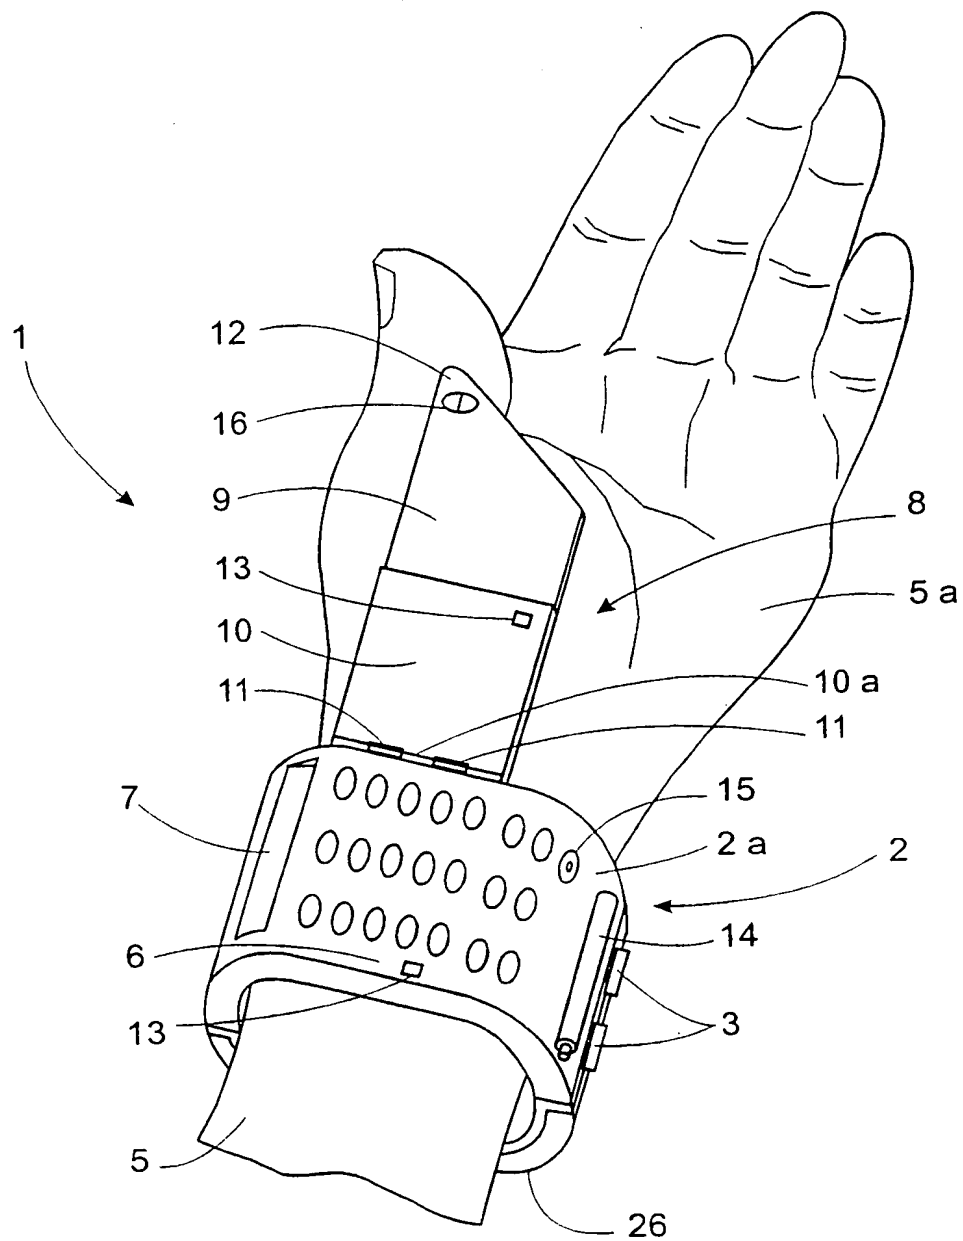


Fig. 1

2/5

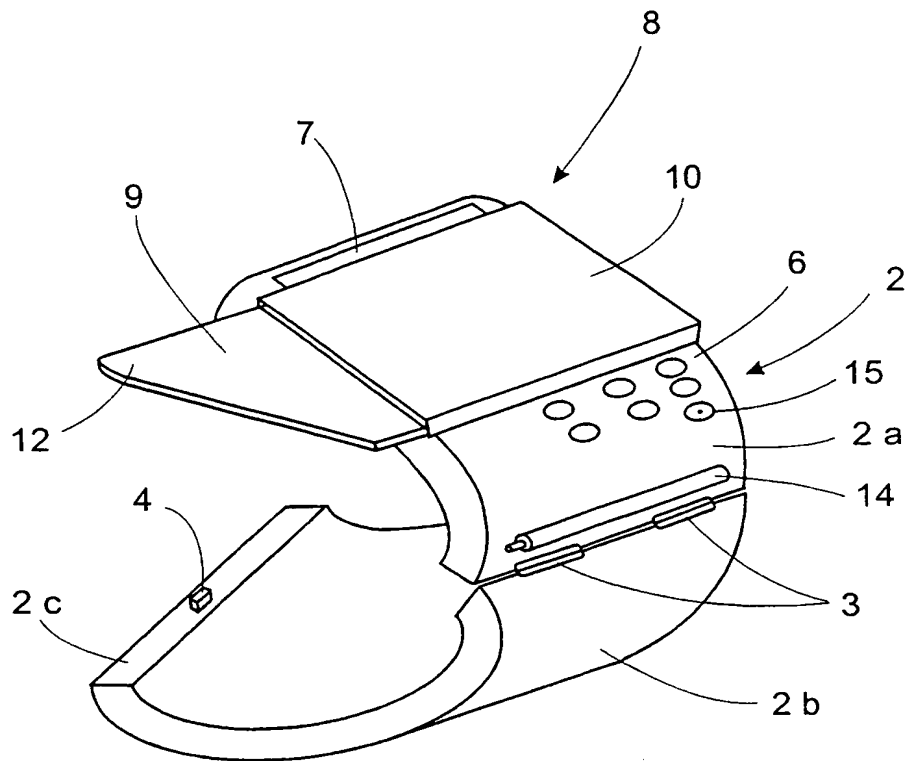


Fig. 2

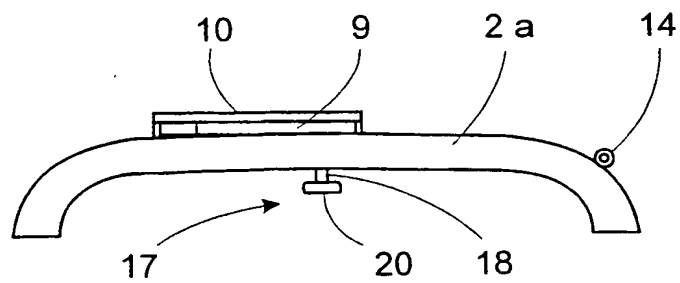


Fig. 3a

3/5

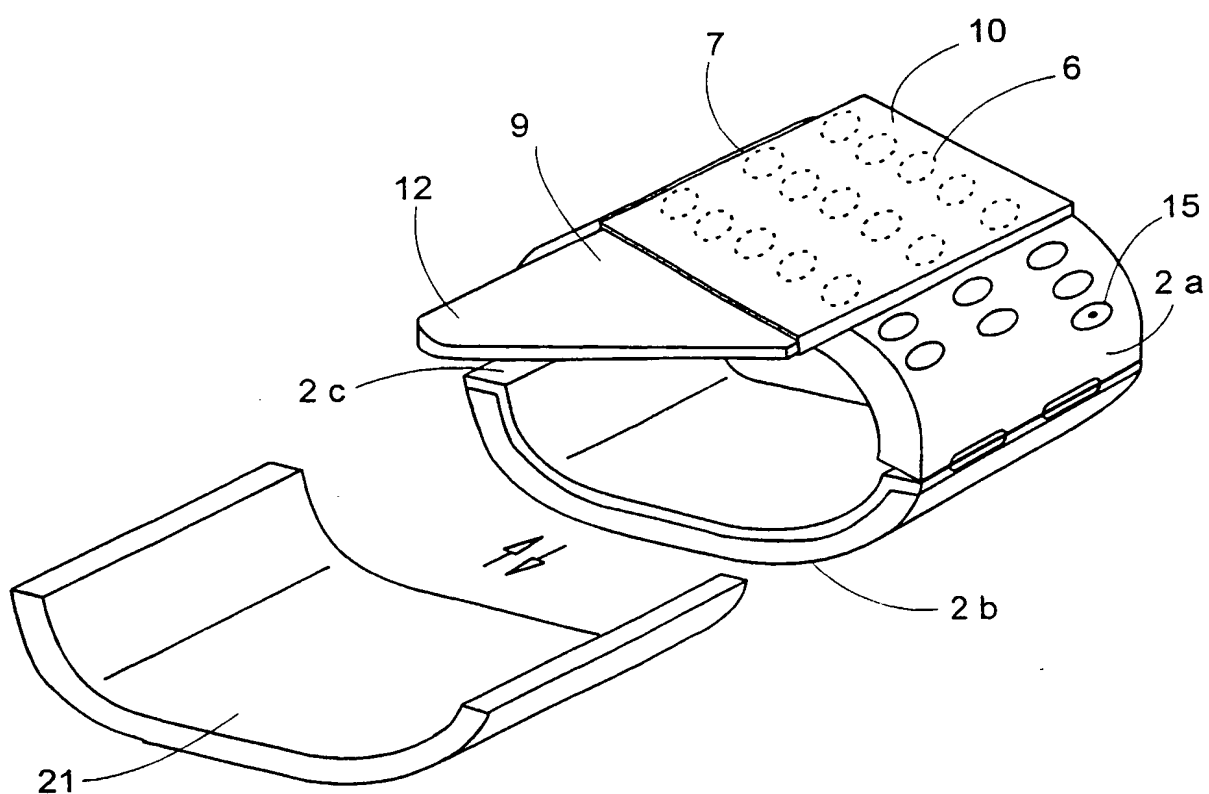


Fig. 3b

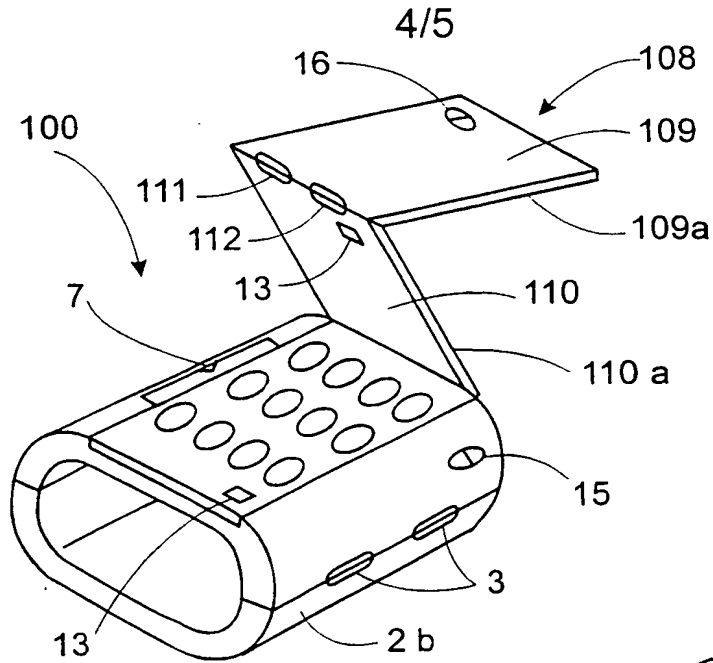


Fig.4 a

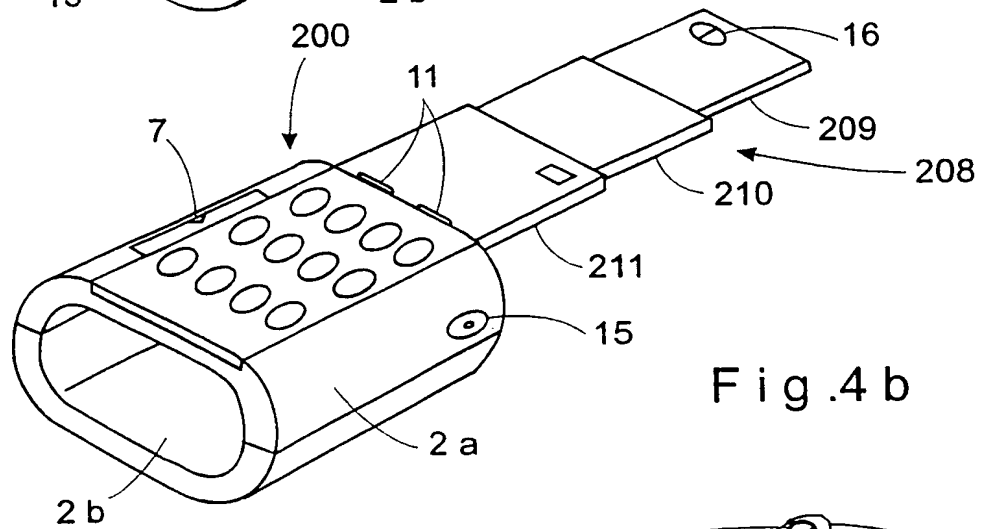


Fig.4 b

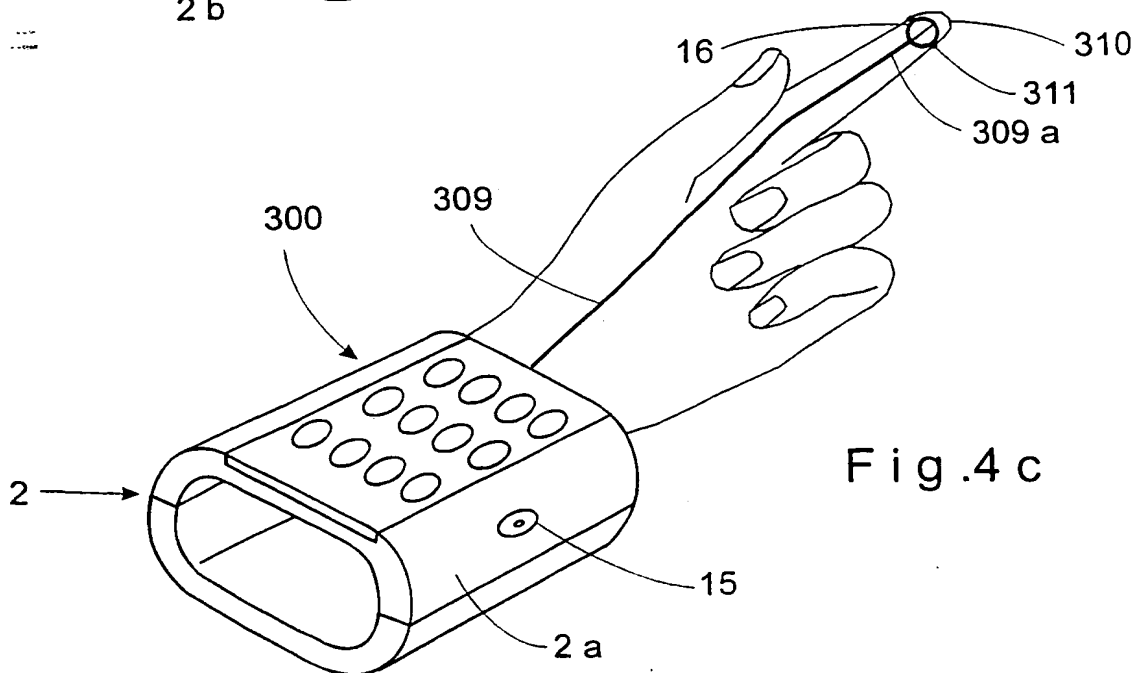


Fig.4 c

5/5

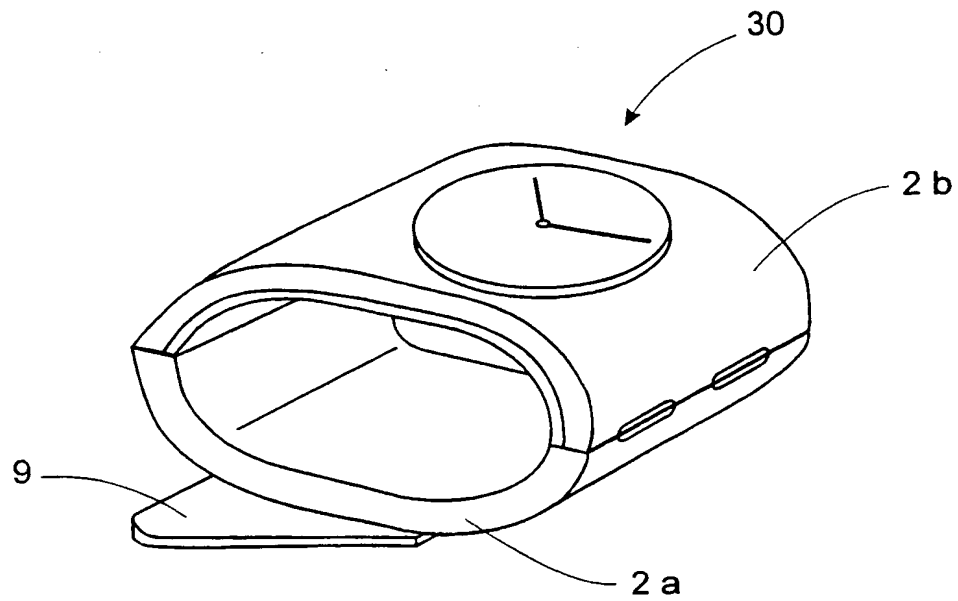


Fig. 5a

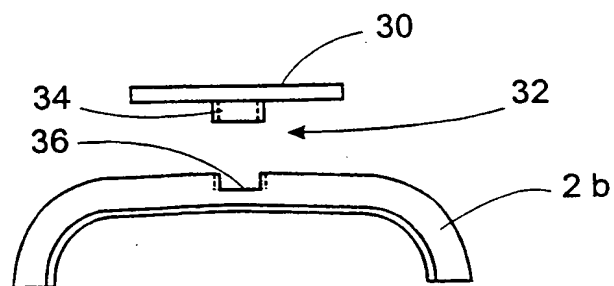


Fig. 5b

**THIS PAGE BLANK (USPTO)**






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04B 1/38</b>		<b>A3</b>	(11) International Publication Number: <b>WO 98/27702</b>
			(43) International Publication Date: 25 June 1998 (25.06.98)
(21) International Application Number: PCT/IL97/00414 (22) International Filing Date: 18 December 1997 (18.12.97) (30) Priority Data: 119873                      19 December 1996 (19.12.96)      IL 120605                      4 April 1997 (04.04.97)              IL (71)(72) Applicant and Inventor: GHASSABIAN, Firooz [FR/IL]; Kashani Street 13, 69499 Ramat-Aviv (IL). (74) Agent: REINHOLD COHN AND PARTNERS; P.O. Box 4060, 61040 Tel Aviv (IL).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>  (88) Date of publication of the international search report: 8 October 1998 (08.10.98)	

(54) Title: A WRIST-MOUNTED TELEPHONE DEVICE

## (57) Abstract

A wrist-mounted cellular telephone device (1) for attaching to a wearer's wrist (5). The device (1) comprises a cellular phone mechanism mounted in a housing (2) and a battery power source coupled to the housing (2). The battery power source circumferentially extends along at least a substantial portion of the wearer's wrist (5).

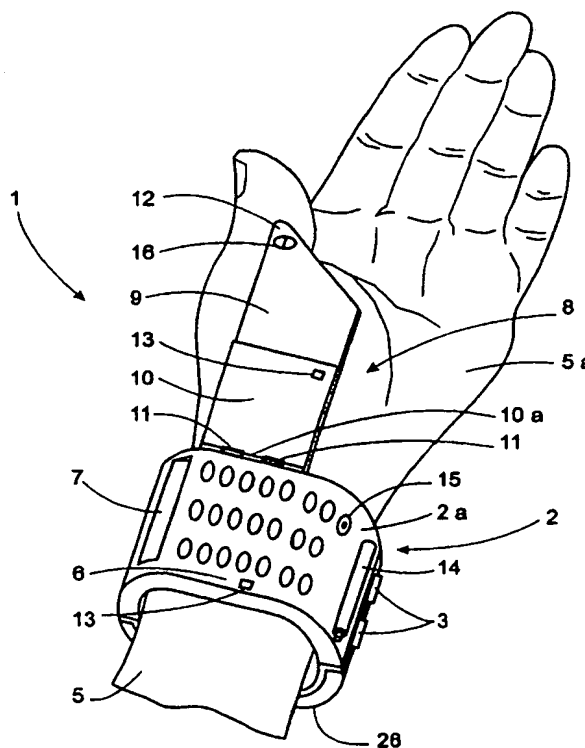

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/IL97/00414

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04B 1/38

US CL : 455 575

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 455 575, 90, 550, 572, 351 379/433

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
NONEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
NONE

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,239,521 A (BLONDER) 24 AUGUST 1993, SEE ABSTRACT	1-36
A	US 5,564,082 A (BLONDER ET AL.) 08 OCTOBER 1996, SEE ABSTRACT	1-36
A,P	US 5,695,885 A (MALHI) 09 DECEMBER 1997, SEE ABSTRACT	1-36
A	US 4,847,818 A (OLSEN) 11 JULY 1989, SEE ABSTRACT	1-36
A,P	US 5,659,611 A (SAKSA) 19 AUGUST 1997, SEE ABSTRACT	1-36
A	US 5,008,864 A (YOSHITAKE) 16 APRIL 1991, SEE ABSTRACT	1-36



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*B* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

02 JULY 1998

Date of mailing of the international search report

12 AUG 1998

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

MARSHA D. BANKS-HAROLD

Telephone No. (703) 305-4700

**THIS PAGE BLANK (USPTO)**